


TOGGLES


[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

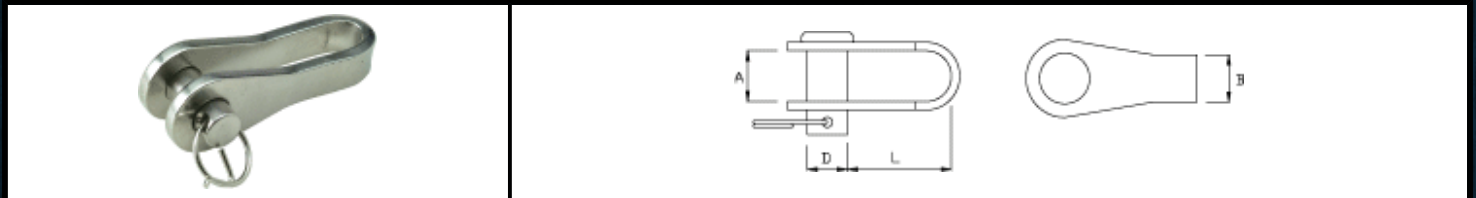

Cat. No.	L (mm.)	A (mm.)	B (mm.)	D (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
140006	25	7,5	7	6	1.800	2,3	10
140008	30	8,5	7,7	8	3.600	4	10
140010	40	10,5	10,2	9,5	4.000	5,9	10
140011	45	11,5	10,5	11	4.800	8,5	10
140012	50	13,5	12	12	5.800	12,4	10

Note: All breakloads are determined by clevis pin.
The user is responsible for choosing the proper cable diameter and for correct assembly.

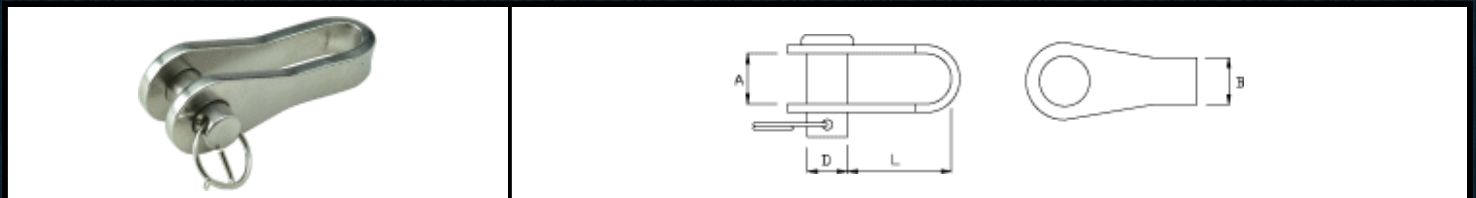

Cat. No.	A (mm.)	B (mm.)	D1 (mm.)	D2 (mm.)	L (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
140506	7	5	5,5	5	25	1.300	1,8	10
140608	8	6	6,5	6	27	1.800	3	10
140810	10	8	8,5	8	33	3.200	5,5	10
141011	12	9	10	9,5	37	3.500	7,2	10
141111	15	9	11,5	11	45	5.200	12,1	10
141214	14	10	12,5	12	48	5.900	14,5	10
141616	21	14	14,5	14	62	7.500	28	10

Note: All breakloads are determined by clevis pin.
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)



Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648
E-Mail: info@allrig.net | www.allrig.net