






Series 50

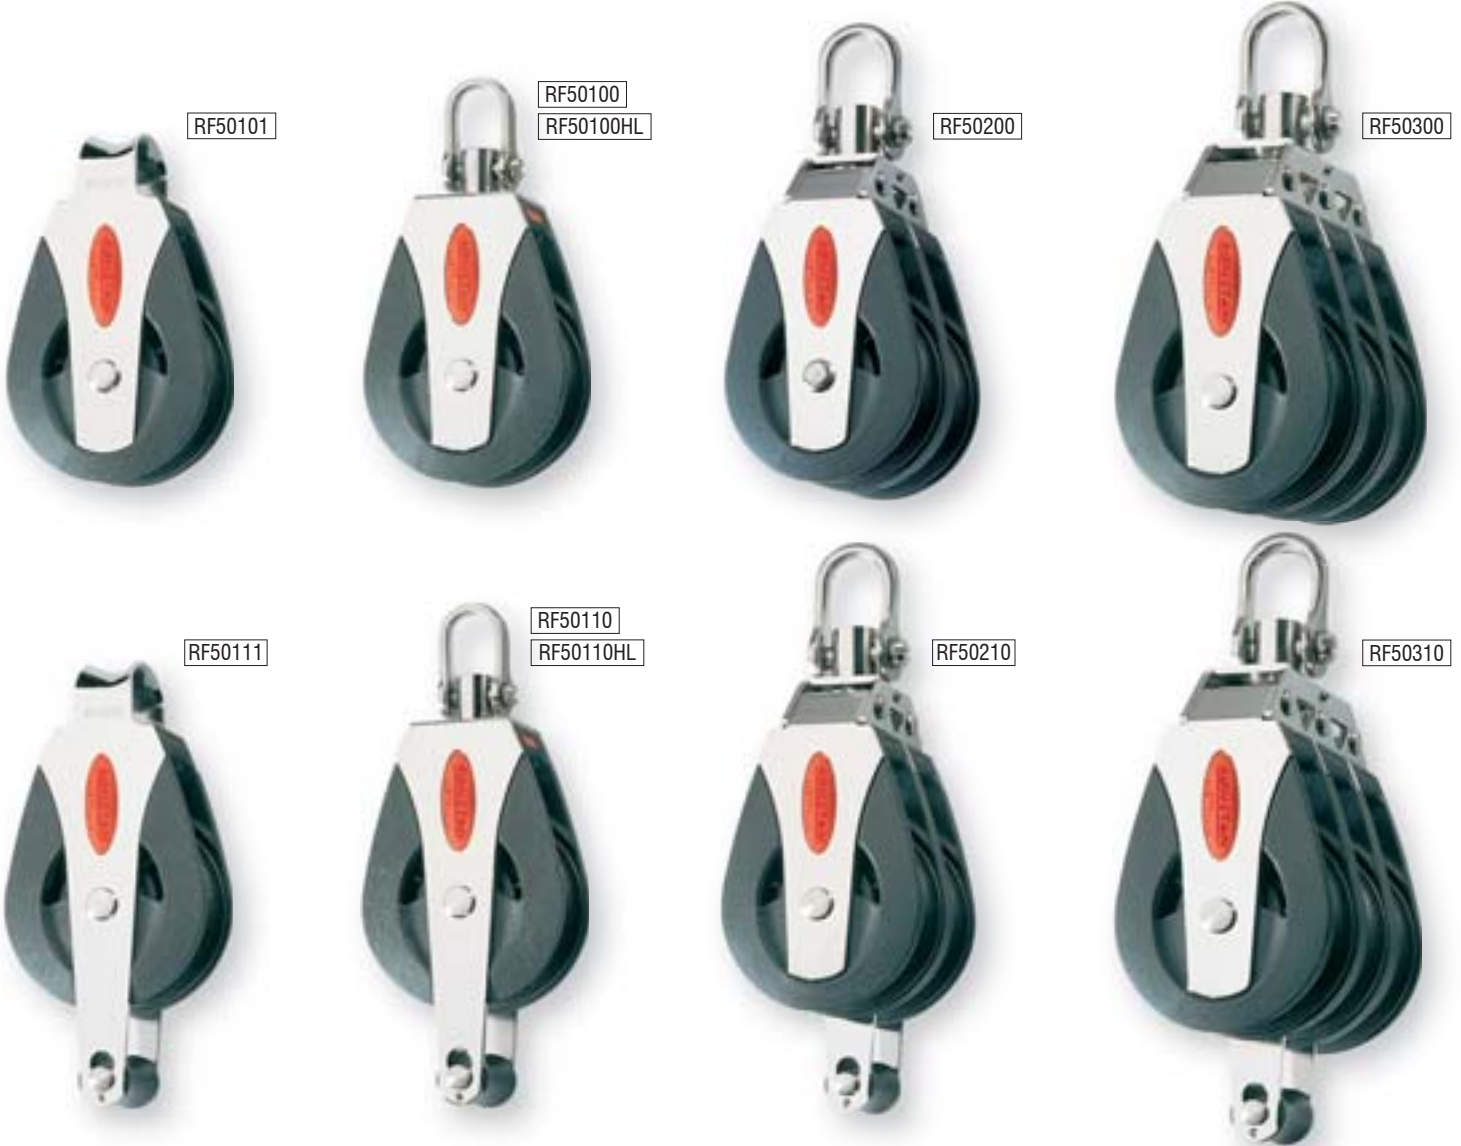

 **RF150**
4.8mm (3/16") pin, suits
single and fiddle blocks

 **RF151**
6mm (1/4") pin, suits
double and triple blocks


 **RF1057**
Suits loop head and
shackle head blocks

 **RF321**
Suits swivel
shackle lead blocks

- ✓ Low friction, 2-stage ball bearing system provides consistent performance over the full load range.
- ✓ High static and dynamic load capacity.
- ✓ Light weight.

- ✓ Captive Lock™ universal head can be fixed at 0° or 90°, or left free to swivel 360°.
- ✓ Cheek cut-outs for easy bearing maintenance.
- ✓ Double & triple blocks can be locked at 0° or 90°, or left free to swivel, by adjusting the head post grub screw.


PRODUCT No.	DESCRIPTION	SHEAVE	MAX.	MAX.	PIN	M.W.L.	B.L.	WEIGHT	SHEAVE	MAX.	MAX.	PIN	M.W.L.	B.L.	WEIGHT
		DIAM.	ROPE	WIRE	DIAM.	kg	kg	g	DIAM.	ROPE	WIRE	DIAM.	lb	lb	oz
		mm	mm	mm	mm				in.	in.	in.	in.			
BB Ball Bearing															
RF50100	Single block, universal head	50	12	-	5	500	1500	117	2	1/2	-	3/16	1100	3310	4.1
RF50101	Single block, loop head	50	12	-	-	500	1500	97	2	1/2	-	-	1100	3310	3.4
RF50110	Single block, becket, universal head	50	12	-	5	500	1500	133	2	1/2	-	3/16	1100	3310	4.7
RF50111	Single block, becket, loop head	50	12	-	-	500	1500	113	2	1/2	-	-	1100	3310	4.0
RF50200	Double block, universal head	50	12	-	6	800	2000	254	2	1/2	-	1/4	1760	4410	9.0
RF50210	Double block, becket, universal head	50	12	-	6	800	2000	270	2	1/2	-	1/4	1760	4410	9.5
RF50300	Triple block, universal head	50	12	-	6	1000	2400	367	2	1/2	-	1/4	2200	5290	12.9
RF50310	Triple block, becket, universal head	50	12	-	6	1000	2400	385	2	1/2	-	1/4	2200	5290	13.6
HL High Load															
RF50100HL	Single block, universal head	50	12	5	5	800	1500	117	2	1/2	3/16	3/16	1760	3310	4.1
RF50110HL	Single block, becket, universal head	50	12	5	5	800	1500	133	2	1/2	3/16	3/16	1760	3310	4.7



- Removable becket pins allow lines to be spliced prior to fitting and are locked into position without the use of split rings or tools.
- Jib lead slide with pin stop suits RC7250 25mm (1") T-track.
- A stand-up base adapter and snap shackle adapters add functionality to single and fiddle blocks.
- Clevis Pin head blocks have an alloy sheave with oversize Torlon® ball bearings to minimise friction.

PRODUCT No.	DESCRIPTION	SHEAVE	MAX.	MAX.	PIN	M.W.L.	B.L.	WEIGHT	SHEAVE	MAX.	MAX.	PIN	M.W.L.	B.L.	WEIGHT
		DIAM.	ROPE	WIRE	DIAM.	kg	kg	g	DIAM.	ROPE	WIRE	DIAM.	lb	lb	oz
		mm	mm	mm	mm				in.	in.	in.	in.			
BB Ball Bearing															
RC72534	Single block, 25mm (1") T-track slide	50	12	-	-	450	900	213	2	1/2	-	-	990	1980	7.4
RF50140	Stand-up block, swivel head	50	12	-	-	500	1000	117	2	1/2	-	-	1100	2200	4.1
RF50171	Upright lead block	50	12	-	-	500	1500	116	2	1/2	-	-	1100	3310	4.1
RF54000	Sheave, alloy, Torlon® balls	50	8	-	-	450	-	31	2	5/16	-	-	990	-	1.1
RF54108	Single block, clevis pin head, alloy sheave, Torlon® balls	50	8	-	8	450	1350	117	2	5/16	-	5/16	990	2980	4.1
RF54118	Single block, becket, clevis pin head, alloy sheave, Torlon® balls	50	8	-	8	675	1350	138	2	5/16	-	5/16	1490	2980	4.9
HL High Load															
RF50000HL	Sheave, HL Nylatron®	50	12	5	-	-	-	27	2	1/2	3/16	-	-	-	1.0
RF50171HL	Upright lead block	50	12	5	-	800	1500	115	2	1/2	3/16	-	1760	3310	4.1
Accessories															
RF2450	Stand-up base, 51 x 75mm (2" x 2 31/32") base	-	-	-	5	500	1000	86	-	-	-	3/16	1100	2200	3.0

Series 50

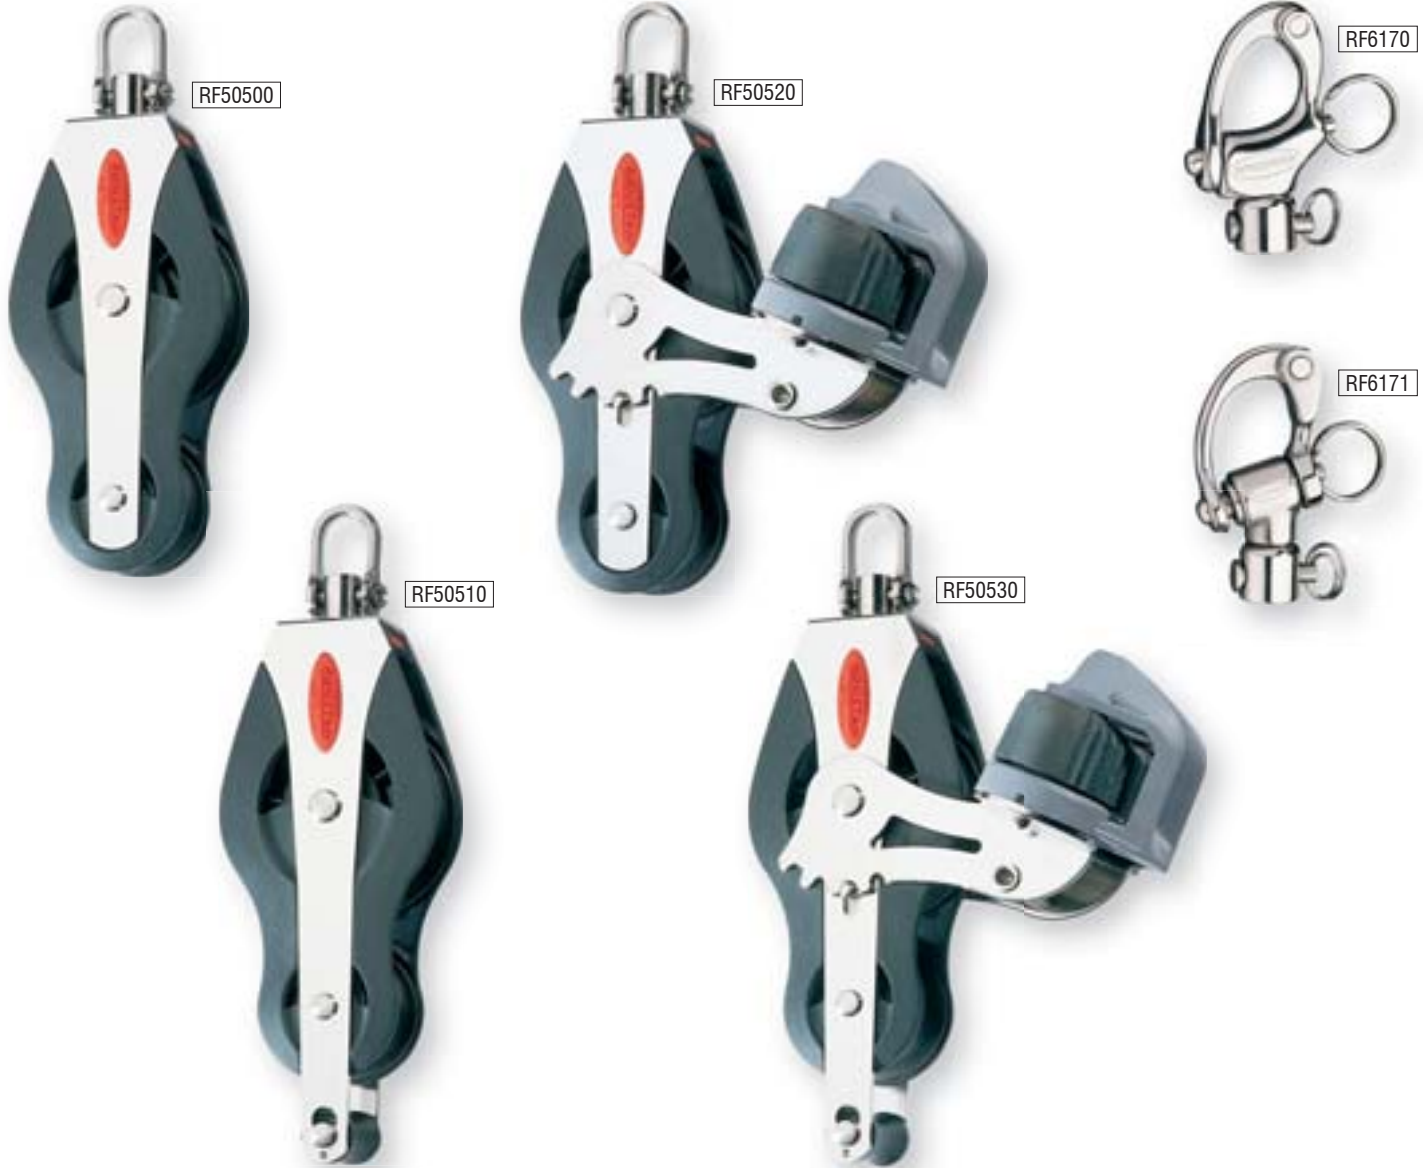

RF150
4.8mm (3/16") pin

RF51010
snap-in keyhole becket pin

RF51011
becket pin with split ring

- ✓ Captive Lock™ universal head can be fixed at 0° or 90°, or left free to swivel 360°.
- ✓ Quick adjusting cleat arms require no tools to adjust and fix in desired position.
- ✓ Snap shackle adapters suit single and fiddle blocks and are available in standard and trunnion versions.
- ✓ Fiddle blocks are ideal for fine-tune mainsheet tackles, cunninghams, boom vang, backstays and other control line purchase systems.

- Acetal ball bearings.
- Alloy sheave versions use Torlon® ball bearings.
- High Load sheave uses self lubricating Nylatron®.
- U.V. stabilised Acetal sheaves.
- Impact modified, fibre reinforced and U.V. stabilised Nylon cheeks.
- Grade 316 stainless steel load straps and head fittings.

PRODUCT No.	DESCRIPTION	SHEAVE	MAX.	PIN	M.W.L.	B.L.	WEIGHT	SHEAVE	MAX.	PIN	M.W.L.	B.L.	WEIGHT
		DIAM.	ROPE	DIAM.	kg	kg	g	DIAM.	ROPE	DIAM.	lb	lb	oz
		mm	mm	mm				in.	in.	in.			
BB Ball Bearing													
RF50500	Fiddle block, universal head	54 + 34	10	5	500	1500	166	2 1/8 + 1 5/16	3/8	3/16	1100	3310	5.9
RF50510	Fiddle block, becket, universal head	54 + 34	10	5	500	1500	175	2 1/8 + 1 5/16	3/8	3/16	1100	3310	6.2
RF50520	Fiddle block, adjustable cleat, universal head	54 + 34	10	5	500	1500	309	2 1/8 + 1 5/16	3/8	3/16	1100	3310	10.9
RF50530	Fiddle block, becket, adjustable cleat, universal head	54 + 34	10	5	500	1500	334	2 1/8 + 1 5/16	3/8	3/16	1100	3310	11.8
Accessories													
RF6170	Snap shackle head adapter	-	-	5	500	1000	49	-	-	3/16	1100	2200	1.7
RF6171	Trunnion snap shackle head adapter	-	-	5	500	1000	62	-	-	3/16	1100	2200	2.2