

Snatch Blocks

CAM LOCK™ OPERATION



- ✓ Convenient solution for temporary leads and line deflection.
- ✓ Easily operated latch mechanism.
- ✓ Soft resilient cheeks reduce clatter and protect gelcoat and painted surfaces.
- ✓ “Cam Lock™” versions have a simple rotating cam mechanism for positive closure and easy opening.
- ✓ Snap shackle head allows block swivel through 360°.
- ✓ Blocks with trunnion snap shackles allow additional articulation from side to side.

- ✓ Removable spinnaker sheet deflector blocks for boats up to 11m (36ft).
- ✓ Temporary sheeting point while changing sheets for boats up to 11m (36ft).
- ✓ Temporary reefing block for boats up to 11m (36ft).
- ✓ Spare or replacement block for general use on larger boats depending on line angle and load.
- ✓ Temporary outboard sheet lead for headsail trimming.
- ✓ Grade 316 stainless steel frame, load strap and needle roller bearings.
- ✓ Hardcote anodised alloy sheave.
- ✓ Soft PVC cheeks.
- ✓ Investment cast Grade 15-5PH stainless steel snap shackle.

PRODUCT No.	DESCRIPTION	SHEAVE	MAX.	M.W.L.	B.L.	WEIGHT	SHEAVE	MAX.	M.W.L.	B.L.	WEIGHT
		DIAM.	ROPE	kg	kg	g	DIAM.	ROPE	lb	lb	oz
		mm	mm				in.	in.			
RF6730	Snatch block, roller bearings	45	16	1600	3200	550	1 3/4	5/8	3530	7050	19.4
RF6741	Snatch block, trunnion, roller bearings	45	16	1500	3000	610	1 3/4	5/8	3310	6610	21.5
RF6830	Cam Lock™ snatch block, roller bearings	45	16	1600	3200	610	1 3/4	5/8	3530	7050	21.5
RF6831	Cam Lock™ snatch block, trunnion, roller bearings	45	16	1500	3000	680	1 3/4	5/8	3310	6610	24.0

Snatch Blocks



RF6710



RF6711



RF6720



RF6721


- ✓ Easily operated latch mechanism.
- ✓ Soft resilient cheeks reduce clatter and protect gelcoat and painted surfaces.
- ✓ Attachment point provided for a shock cord hanger.
- ✓ Blocks with trunnion shackles allow additional articulation from side to side.
- ✓ Temporary sheeting point while changing sheets for boats up to 10m (33ft).
- ✓ Temporary reefing block for boats up to 10m (33ft).

- ✓ Spare or replacement block for general use on larger boats depending on line angle and load.
- ✓ Grade 316 stainless steel frame, load strap and hub.
- ✓ U.V. stabilised Acetal sheaves.
- ✓ Soft, thermoplastic rubber cheeks.
- ✓ Investment cast Grade 15-5PH stainless steel snap shackle.

PRODUCT No.	DESCRIPTION	SHEAVE	MAX.	M.W.L.	B.L.	WEIGHT	SHEAVE	MAX.	M.W.L.	B.L.	WEIGHT
		DIAM.	ROPE	kg	kg	g	DIAM.	ROPE	lb	lb	oz
		mm	mm				in.	in.			
RF6710	Snatch block	51	11	500	1000	250	2	7/16	1100	2200	8.8
RF6711	Snatch block, trunnion	51	11	500	1000	260	2	7/16	1100	2200	9.2
RF6720	Snatch block	64	12	1000	2000	480	2 1/2	1/2	2200	4410	16.9
RF6721	Snatch block, trunnion	64	12	1000	2000	510	2 1/2	1/2	2200	4410	18.0

AP All Purpose

Snatch Blocks

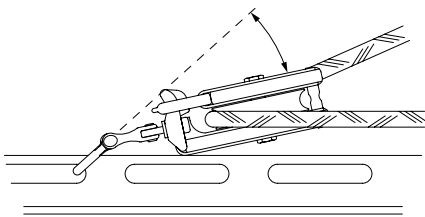

Trunnion articulation provides correct lead when in restricted situations, such as toe-rail attachment.

- ✓ Convenient solution for temporary leads and line deflection.
- ✓ Stainless steel sheaves running on needle roller bearings deliver low friction performance and a long service life.
- ✓ Extra wide stainless steel frame prevents lines jamming between sheave and cheek.
- ✓ Sheaves are removable for easy servicing.
- ✓ RF6841 "Cam Lock™" version features a simple rotating cam mechanism for positive closure and easy opening.
- ✓ Removable spinnaker sheet deflector blocks for boats up to 13m (43ft).

TRUNNION ARTICULATION



- ✓ Temporary sheeting point while changing sheets for boats up to 13m (43ft).
- ✓ Temporary reefing block for boats up to 13m (43ft).
- ✓ Spare or replacement block for general use on larger boats depending on line angle and load.
- ✓ Temporary outboard sheet lead for headsail trimming.
- ✓ Grade 316 stainless steel frame, load strap, sheave and needle roller bearings.
- ✓ Soft, thermoplastic rubber cheeks.
- ✓ Investment cast Grade 15-5PH stainless steel snap shackle.

PRODUCT No.	DESCRIPTION	SHEAVE DIAM. mm	MAX. ROPE mm	M.W.L. kg	B.L. kg	WEIGHT g	SHEAVE DIAM. in.	MAX. ROPE in.	M.W.L. lb	B.L. lb	WEIGHT oz
RF6841	Cam Lock™ snatch block, trunnion	95	14	1500	3000	1270	3 3/4	9/16	3310	6610	44.8
RF6751	Snatch block, trunnion	80	19	3000	6000	1480	3 1/8	3/4	6610	13230	52.2
RF6761	Snatch block, trunnion	108	22	3750	7500	2290	4 1/4	7/8	8270	16530	80.8