


Sheaves

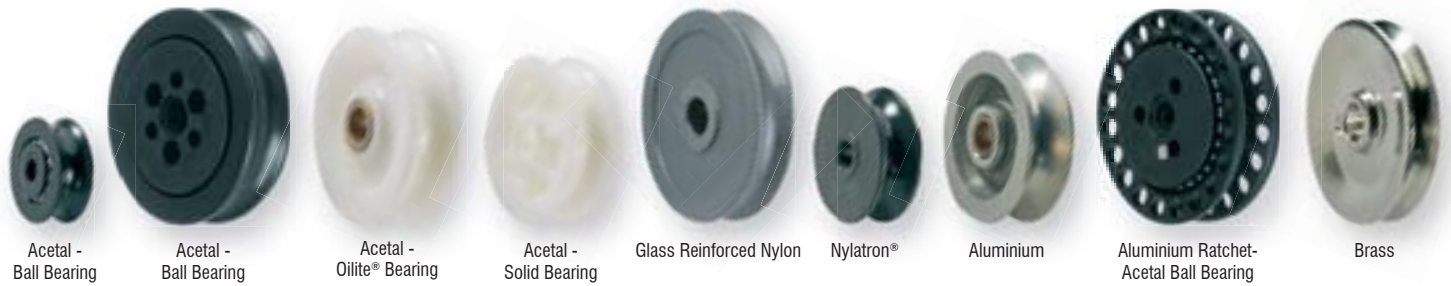

ACETAL SHEAVES

- ✔ Choice of bearings
- ✔ Acetal ball bearings - minimum friction under moderate loads.
- ✔ Solid bearing - high strength and durability, utilizing the self-lubricating properties of Acetal.
- ✔ Oilite® bearing - Oil impregnated self-lubricating bearing for highest load applications.
- ✔ U.V. resistant Acetal sheaves.

GLASS REINFORCED NYLON SHEAVES

- ✔ Glass reinforced for greater strength and abrasion resistance.

NYLATRON® SHEAVES

- ✔ Cast partially cross-linked polyamide compound, modified with a MoS2 filler for lubrication and to minimize wear.
- ✔ Suitable for use with wire or rope.

ALUMINIUM SHEAVES

- ✔ Suitable for use with wire or rope (excludes ratchet).
- ✔ Self-lubricating Oilite® bearing.
- ✔ Anodised aluminium for corrosion resistance and high strength.

BRASS SHEAVES

- ✔ Suitable for use with wire or rope.
- ✔ Nickel plated for corrosion wear resistance.

PRODUCT No.	DIAM. mm	BORE mm	WIDTH mm	MAX. ROPE mm	MAX. WIRE mm	DIAM. in.	BORE in.	WIDTH in.	MAX. ROPE in.	MAX. WIRE in.	BLOCK SUITED
ACETAL – Ball Bearing											
RF1020	28.0	5.0	11.1	6	-	1 1/8	3/16	7/16	1/4	-	-
RF1766	38.0	8.0	15.0	10	-	1 1/2	5/16	19/32	3/8	-	-
RF1767	50.4	8.0	14.3	10	-	2	5/16	9/16	3/8	-	-
RF60000	60.0	3 x 6.2	16.6	10	-	2 3/8	3 x 7/32	21/32	3/8	-	Series 60 BB
RF70000	75.0	3 x 6.2	20.8	12	-	3	3 x 7/32	13/16	1/2	-	Series 75 BB
ACETAL – Oilite® Bearing											
RF431	73.0	12.7	21.2	14	-	2 7/8	1/2	27/32	9/16	-	Series 75 AP
ACETAL – Solid Bearing											
RF1741	19.0	6.6	6.4	6	-	3/4	1/4	1/4	1/4	-	-
RF1743	19.0	8.2	9.5	6	-	3/4	5/16	3/8	1/4	-	-
RF578	25.0	6.5	9.5	6	-	1	1/4	3/8	1/4	-	-
RF128	28.0	8.1	15.2	12	-	1 1/8	5/16	19/32	1/2	-	-
RF129	28.0	6.6	9.9	8	-	1 1/8	1/4	3/8	5/16	-	-
RF1749	29.0	11.3	15.6	12	-	1 1/8	7/16	19/32	1/2	-	-
RF251	38.0	6.5	9.9	8	-	1 1/2	1/4	3/8	5/16	-	-
RF41000	40.0	8.1	14.4	10	-	1 9/16	5/16	9/16	13/32	-	Series 40 AP
RF1006	38.0	12.7	15.5	12	-	1 1/2	1/2	19/32	1/2	-	Series 38 Deck Organisers
RF1751	38.0	8.2	10.2	6	-	1 1/2	11/32	13/32	1/4	-	-
RF1759	50.0	8.1	15.6	14	-	1 15/16	11/32	19/32	9/16	-	-
RF127	55.0	11.3	15.6	12	-	2 3/16	7/16	19/32	1/2	-	-
RF130	55.0	9.8	14.0	6	-	2 3/16	3/8	9/16	1/4	-	-
RF437	60.0	11.4	19.0	16	-	2 3/8	7/16	3/4	5/8	-	Series 60 AP
RF1765	66.0	8.2	15.1	5	-	2 5/8	11/32	15/32	3/16	-	-
GLASS REINFORCED NYLON											
PNP98JR	75.0	12.0	15.8	10	-	2 15/16	15/32	19/32	3/8	-	-
PNP98KR	100.0	12.0	19.0	12	-	3 15/16	15/32	3/4	1/2	-	-
PNP98NR	150.0	12.5	19.0	14	-	5 7/8	1/2	3/4	9/16	-	-
NYLATRON®											
RF131	25.0	6.6	6.4	-	5	31/32	1/4	1/4	-	3/16	-
RF30000HL	30.0	8.1	11.4	8	3	1 3/16	5/16	7/16	5/16	1/8	Series 30 HL
RF40000HL	40.0	8.1	13.4	10	4	1 1/2	5/16	17/32	3/8	5/32	Series 40 HL
RF132	45.0	8.0	9.5	-	6	1 3/4	5/16	3/8	-	1/4	RF103, RF104
RF50000HL	50.0	10.2	18.0	12	5	1 31/32	13/32	23/32	1/2	3/16	Series 50 HL
ALUMINIUM											
RF436	62.0	11.2	19.0	12	6	2 7/16	7/16	3/4	1/2	1/4	Series 60 AP
RF2855	76.0	9.6	15.6	12	6	3	3/8	19/32	1/2	1/4	-
RF1060	76.0	16.0	22.2	14	18	3	5/8	7/8	9/16	23/32	-
RF2857	102.0	11.3	18.2	14	8	4	7/16	23/32	9/16	5/16	-
ALUMINIUM RATCHET - ACETAL Ball Bearing											
RF62000	60.0	3 x 6.1	16.6	10	-	2 3/8	3 x 7/32	21/32	3/8	-	Series 60 RT
RF72000	75.0	3 x 6.1	20.8	12	-	3	3 x 7/32	13/16	1/2	-	Series 75 RT
BRASS											
RF580	57.0	9.8	15.8	-	6	2 1/4	3/8	5/8	-	1/4	-
RF579	74.0	12.9	12.7	-	6	2 15/16	1/2	1/2	-	1/4	RF69, RF69S, RF71