


# C-Cleats & T-Cleats

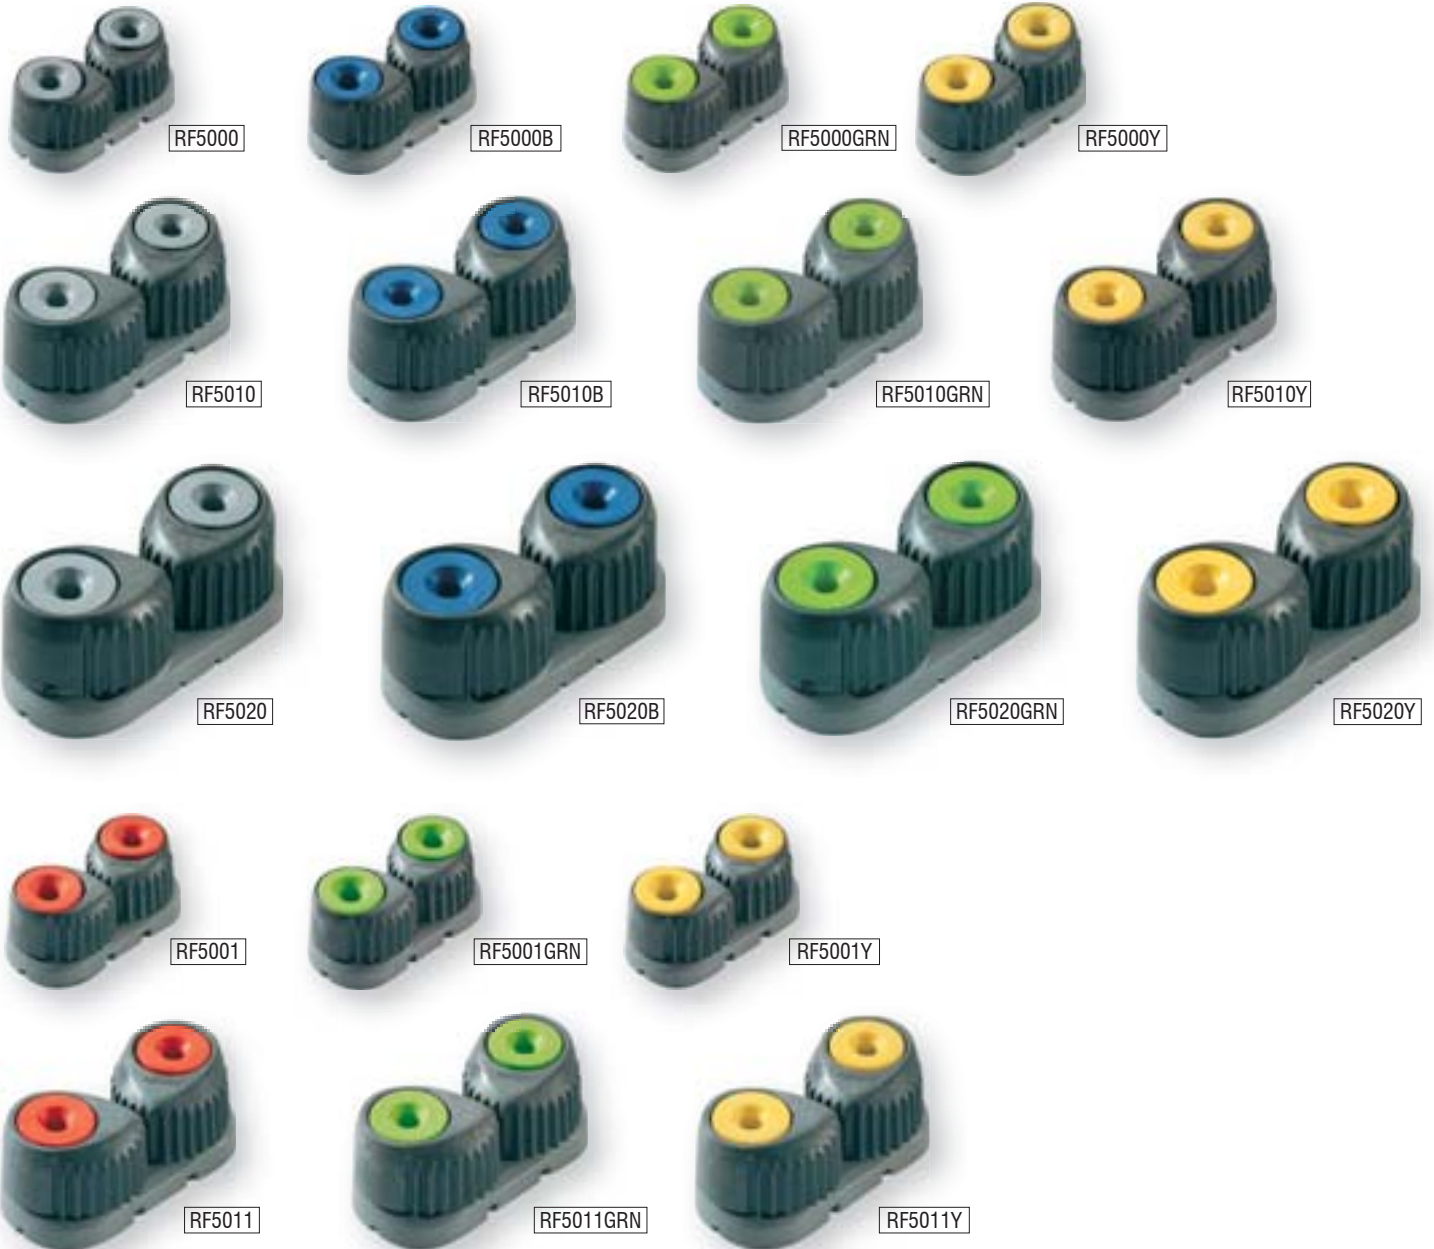

- ✓ Design, materials selection and advanced manufacturing methods combine to deliver superior strength and holding power, light weight and corrosion resistance.
- ✓ Cam profile and multi-coil spring minimise line entry and release effort.
- ✓ Carbon fibre composite cam material provides maximum resistance to heat and abrasion.
- ✓ Unique self-cleaning, self-lubricating slotted bearings ensure consistent high performance even when subjected to high static loads.

- Ⓢ Carbon fibre composite cams (C-Cleats).
- Ⓢ Glass fibre composite cams (T-Cleats).
- Ⓢ Long strand glass fibre reinforced polymer base.
- Ⓢ PTFE impregnated Acetal slotted bearing.
- Ⓢ Stainless steel multi-coil spring.

TYPE & SIZE	ROPE CAPACITY	HOLE SPACING	FASTENER SIZE	DIMENSIONS	M.W.L.	B.L.	WEIGHT	ROPE CAPACITY	HOLE SPACING	FASTENER SIZE	DIMENSIONS	M.W.L.	B.L.	WEIGHT
	mm	mm	mm	mm	kg	kg	g	in.	in.	in.	in.	lb	lb	oz
<b>C-Cleats™</b>														
SMALL (RF5000...)	2-8	27	M4	48L x 24W x 20H	75	150	20	3/32-5/16	1 1/16	3/16	1 7/8L x 1W x 3/4H	165	330	0.7
MEDIUM (RF5010...)	3-12	38	M5	66L x 31W x 26H	125	250	50	1/8-1/2	1 1/2	3/16	2 5/8L x 1 1/4W x 1H	275	550	1.8
LARGE (RF5020...)	6-16	51	M6	88L x 41W x 35H	23	460	110	1/4-5/8	2	1/4	3 1/2L x 1 5/8W x 1 3/8H	510	1010	3.9
<b>T-Cleats™</b>														
SMALL (RF5001...)	2-8	27	M4	48L x 24W x 20H	75	150	20	3/32-5/16	1 1/16	3/16	1 7/8L x 1W x 3/4H	165	330	0.7
MEDIUM (RF5011...)	3-12	38	M5	66L x 31W x 26H	125	250	50	1/8-1/2	1 1/2	3/16	2 5/8L x 1 1/4W x 1H	275	550	1.8