


- ✓ Low profile and light weight, T-track is a simple, reliable system for adjustable sheet leads and spinnaker pole systems.
- ✓ Stainless steel slides have low friction liners and spring-loaded plunger pins for fast, positive positioning.
- ✓ Stand-up blocks on slide provide optimum alignment and low profile lead. The modular RC72539 slide accepts Series 40 and 50 single blocks.

- ✓ Jib leads for 25mm (1") T-track are typically used on boats up to 8m (26ft).
- ✓ Track not suitable for curving.
- ✓ Anodised aluminium alloy track.
- ✓ Grade 316 stainless steel slide bodies.
- ✓ U.V. stabilised Acetal sheaves.
- ✓ Nylon slide liners.

TRACK FASTENINGS – 5mm (3/16") countersunk fasteners at 100mm (3 15/16") centres **STOP HOLES** – 50mm (1 31/32") centres

PRODUCT No.	DESCRIPTION	LENGTH mm	M.W.L. kg	B.L. kg	WEIGHT g	LENGTH in.	M.W.L. lb	B.L. lb	WEIGHT oz
RC00470	Slide liners, plastic (pair)	97	-	-	10	3 16/16	-	-	0.4
RC7250-INS	Track bolt insulator	-	-	-	3	-	-	-	0.1
RC72501	Slide, loop top	92	500	1000	70	3 5/8	1100	2200	2.5
RC72502	Slide, loop top, plunger stop	92	500	1000	100	3 5/8	1100	2200	3.5
RC72503	Slide, loop top, plunger stop	92	650	1300	125	3 5/8	1430	2860	4.4
RC72532	Slide, Series 40 Ball Bearing stand-up block, suits 10mm (3/8") rope, plunger stop	92	350	800	165	3 5/8	770	1760	5.8
RC72533	Slide, Series 40 All Purpose stand-up block, suits 10mm (3/8") rope, plunger stop	92	400	800	166	3 5/8	880	1760	5.9
RC72534	Slide, Series 50 Ball Bearing stand-up block, suits 12mm (1/2") rope, plunger stop	92	450	900	213	3 5/8	990	1980	7.4
RC72535	Slide, Series 50 All Purpose stand-up block, suits 12mm (1/2") rope, plunger stop	92	450	900	215	3 5/8	990	1980	7.6
RC72543	Slide, spinnaker pole ring, plunger stop	92	-	-	145	3 5/8	-	-	5.1
RC72580	Track end, plastic	25	-	-	5	1	-	-	0.2
RF995	49er wing slide, screw-in track stop	92	500	1000	92	3 5/8	1100	2200	3.3
RF996	49er wing slide	92	500	1000	74	3 5/8	1100	2200	2.6
Track – Supplied with RC7250-INS inserts									
RC7250-1.0*	Track, black	996	-	-	385	3'3"	-	-	13.6
RC7250-1.5*	Track, black	1496	-	-	575	4'11"	-	-	20.3
RC7250-2.0*	Track, black	1996	-	-	770	6'7"	-	-	27.2
RC7250-3.0*	Track, black	2996	-	-	1150	9'10"	-	-	40.6
RC7250-6.0*	Track, black	5996	-	-	2300	19'8"	-	-	81.1

* Silver track available - Order as RCxxxxxS

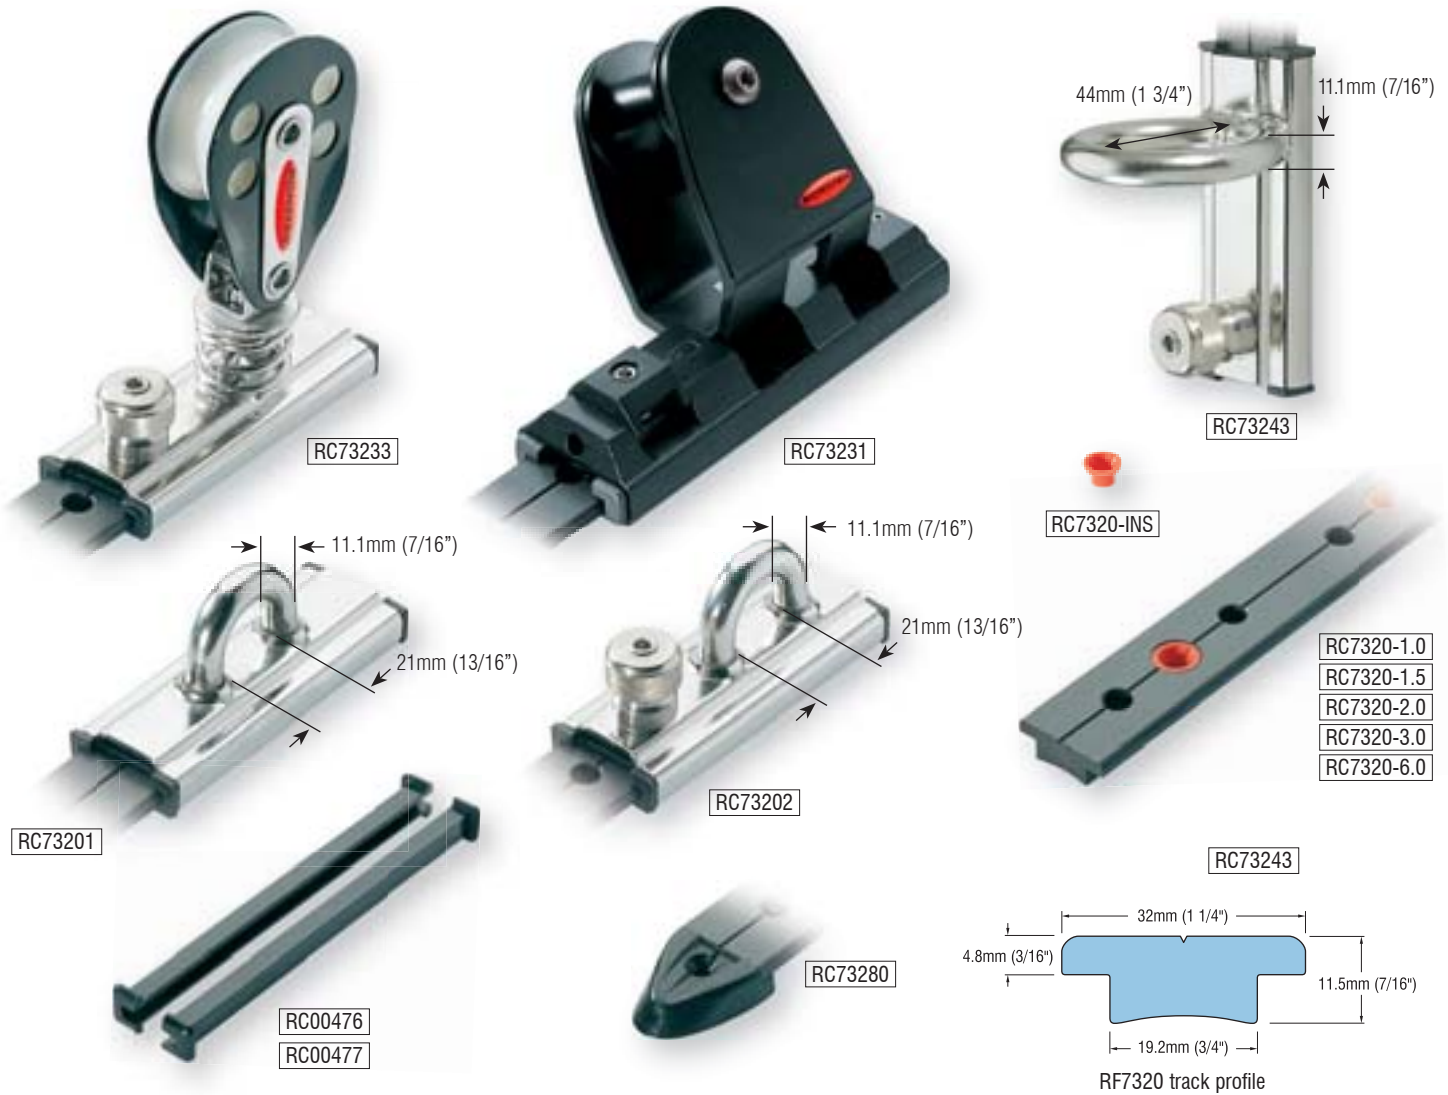

- ✓ RC73232 jib sheet car has a spring hinge for alignment of stirrup with sheet load.
- ✓ Jib sheet leads suit boats to 12m (40ft).
- ✓ RC73231 genoa car can accommodate two sheets for easy headsail changes, and has a plunger stop that can be locked in the "up" position.
- Ⓜ Anodised aluminium alloy track.
- Ⓜ Grade 316 stainless steel slide bodies.
- Ⓜ U.V. stabilised Acetal sheaves.
- Ⓜ Nylon slide liners.

TRACK FASTENINGS – 6mm (1/4") countersunk fasteners at 100mm (3 15/16") centres **STOP HOLES** – 50mm (1 31/32") centres

PRODUCT No.	DESCRIPTION	LENGTH mm	M.W.L. kg	B.L. kg	WEIGHT g	LENGTH in.	M.W.L. lb	B.L. lb	WEIGHT oz
RC00476	Slide liners (pair), plastic, suits RC73201, RC73202, RC73233	107	-	-	-	4 7/32	-	-	-
RC00477	Slide liners (pair), Molybdenum Disulphide impregnated plastic, suits RC73231	152	-	-	11	6	-	-	0.4
RC7320-INS	Track bolt insulator	-	-	-	3	-	-	-	0.1
RC73201	Slide, loop top	102	1000	2000	185	4	2200	4400	6.5
RC73202	Slide, loop top, plunger stop	102	1000	2000	240	4	2200	4400	8.5
RC73231	Genoa car, suits up to twin 16mm (5/8") sheets, lock up/down plunger stop	146	1500	3000	480	5 3/4	3300	6600	17.0
RC73233	Slide, Series 60 AP block, suits 12mm (1/2") rope, plunger stop	102	1000	2000	440	4	2200	4400	15.5
RC73243	Slide, spinnaker pole ring, plunger stop	102	-	-	315	4	-	-	11.1
RC73280	Track end, plastic	32	-	-	35	1 1/4	-	-	1.2
Track – Supplied with RC7320-INS Nylon inserts									
RC7320-1.0*	Track, black	996	-	-	670	3'3"	-	-	23.6
RC7320-1.5*	Track, black	1496	-	-	1000	4'11"	-	-	35.3
RC7320-2.0*	Track, black	1996	-	-	1330	6'7"	-	-	46.9
RC7320-3.0*	Track, black	2996	-	-	2000	9'10"	-	-	70.5
RC7320-6.0*	Track, black	5996	-	-	4000	19'8"	-	-	141.1

* Silver track available - Order as RCxxxxxS