


# Snap Shackles

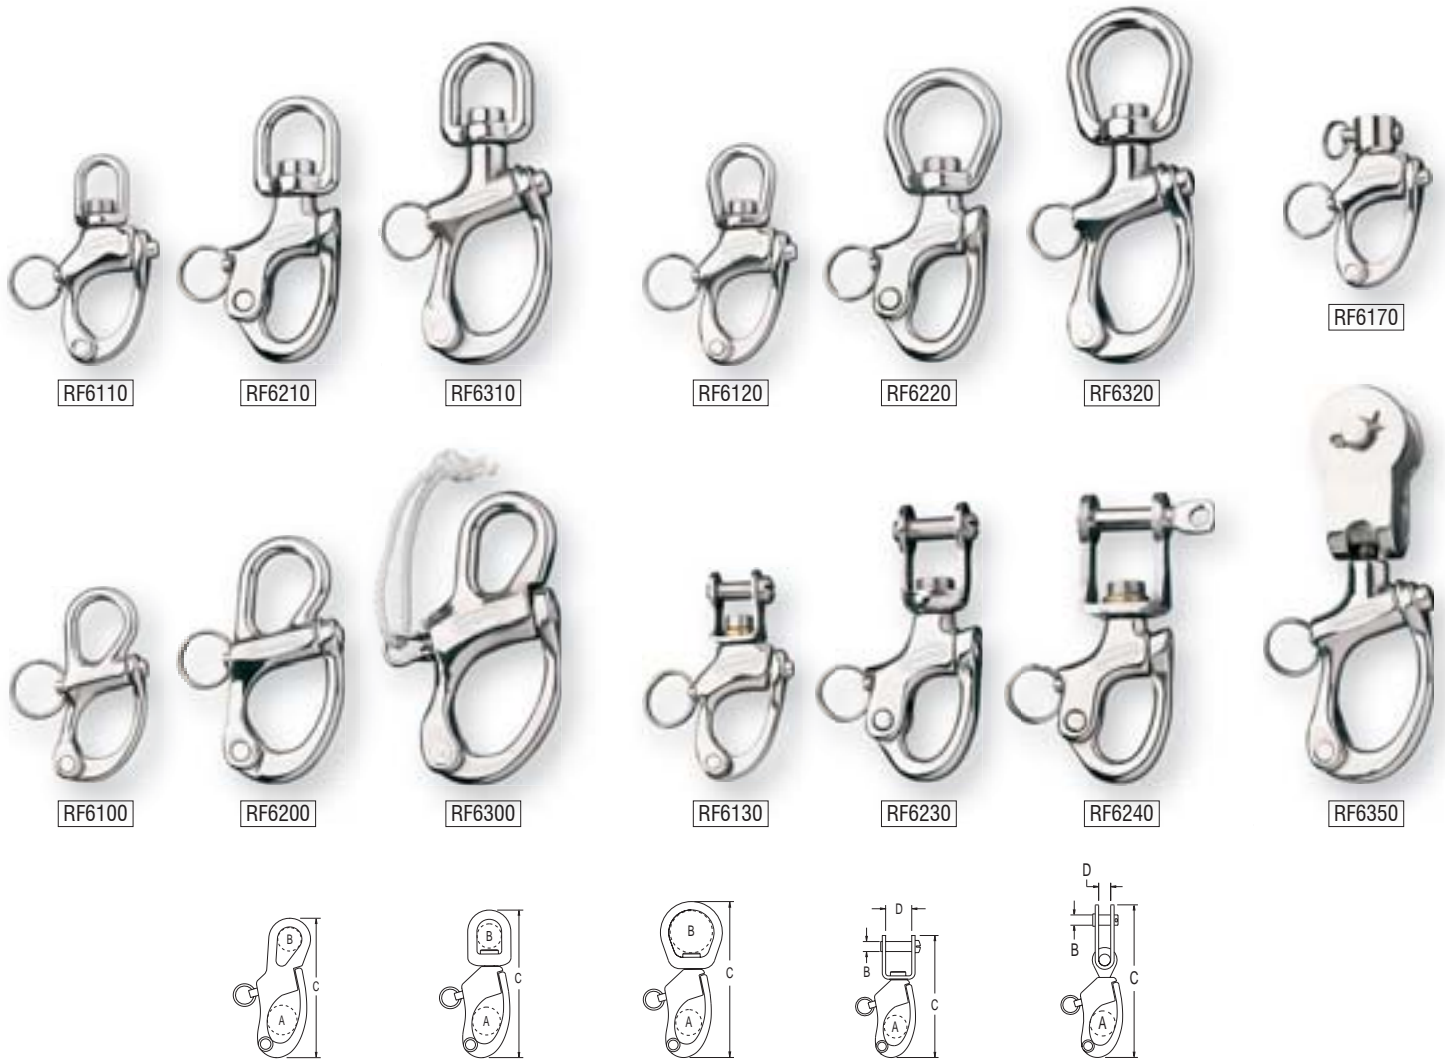

- ✔ Fixed or swivel heads.
- ✔ Heavy duty plunger springs and precision components ensure dependable service.
- ✔ Body and hasp profiles are designed for easy clearance of lines and fittings when released.
- ✔ Stainless steel is used throughout for excellent corrosion resistance.
- ✔ High strength to weight ratio.

- ✔ Split ring on plunger pin is spot welded for security.
- ✔ A lanyard can be attached to the plunger pin for easy opening.
- ✔ RF6170 is a snap shackle block adapter with a 5mm (3/16") pin.
- ✔ Grade 15-5PH investment cast stainless steel body and hasp.
- ✔ Grade 316 stainless steel plunger pin and spring.

PRODUCT No.	HEAD TYPE	A	B	C	D	M.W.L.	B.L.	WEIGHT	A	B	C	D	M.W.L.	B.L.	WEIGHT
		mm	mm	mm	mm	kg	kg	g	in.	in.	in.	in.	lb	lb	oz
<b>Series 100</b>															
RF6100	Fixed bail	16	15.0	66	-	1000	2000	43	5/8	19/32	2 19/32	-	2200	4410	1.5
RF6110	Small swivel bail	16	10.0	69	-	850	1700	50	5/8	13/32	2 23/32	-	1870	3750	1.8
RF6120	Large swivel bail	16	13.0	73	-	750	1500	57	5/8	1/2	2 7/8	-	1650	3310	2.0
RF6130	Swivel shackle	16	6.4	72	13	750	1500	64	5/8	1/4	2 27/32	1/2	1650	3310	2.3
RF6170	Block head adapter	16	5.0	60	-	500	1135	49	5/8	3/16	2 3/8	-	1100	2500	1.7
<b>Series 200</b>															
RF6200	Fixed bail	20	19.0	85	-	900	1800	100	13/16	3/4	3 11/32	-	1980	3970	3.5
RF6210	Small swivel bail	16	16.0	92	-	1600	3200	113	5/8	5/8	3 5/8	-	3530	7050	4.0
RF6220	Large swivel bail	16	25.0	101	-	1100	2200	120	5/8	1	3 31/32	-	2430	4850	4.2
RF6230	Swivel shackle	16	7.9	95	19	1100	2200	120	5/8	5/16	3 3/4	3/4	2430	4850	4.2
RF6240	Swivel shackle	16	7.9	100	22	1100	2200	135	5/8	5/16	3 15/16	7/8	2430	4850	4.8
<b>Series 300</b>															
RF6300	Fixed bail	26	19.0	100	-	2000	4000	155	1 1/32	3/4	3 15/16	-	4410	8820	5.5
RF6310	Small swivel bail	26	16.0	110	-	1800	3600	142	1 1/32	5/8	4 11/32	-	3970	7940	5.0
RF6320	Large swivel bail	26	26.0	122	-	1350	2700	170	1 1/32	1 1/32	4 3/4	-	2980	5950	6.0
RF6350	Swivel toggle	26	9.5	132	13	1500	3000	241	1 1/32	3/8	5 3/16	1/2	3310	6610	8.5