


Swivels, Sister Clips, S-Hooks & Becketts

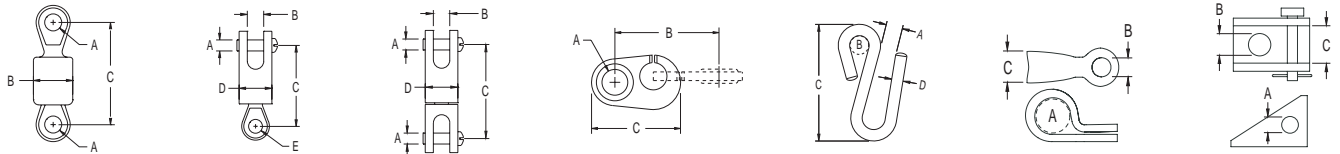

- ✓ Swivels are used in conjunction with blocks, and rigging systems to provide articulation and rotation (not suitable for high speed rotating applications).
- ✓ Ball bearing swivels have lower friction and higher working loads than non-ball bearing versions.
- ✓ S-hooks feature a closed eye and long return leg to ensure a positive attachment and avoid accidental release.
- ✓ Sister clips are a simple, effective means of quickly attaching and detaching ropes.
- ✓ Grade 316 stainless steel.

| PRODUCT No. | TYPE | A | B | C | D | E | B.L. | WEIGHT | A | B | C | D | E | B.L. | WEIGHT |
|------------------------------|-------------|------|------|------|------|------|------|--------|-------|---------|---------|------|------|------|--------|
| | | mm | mm | mm | mm | mm | kg | g | in. | in. | in. | in. | in. | lb | oz |
| Swivels -Ball Bearing | | | | | | | | | | | | | | | |
| RF78* | | 8.2 | 19.0 | 49.0 | - | - | 1000 | 65 | 5/16 | 3/4 | 1 15/16 | - | - | 2200 | 2.3 |
| RF78A | | 6.4 | 9.5 | 53.0 | 19.0 | - | 1700 | 80 | 1/4 | 3/8 | 2 3/32 | 3/4 | - | 3740 | 2.8 |
| RF78B* | | 6.4 | 9.5 | 48.0 | 19.0 | 8.2 | 1700 | 60 | 1/4 | 3/8 | 1 7/8 | 3/4 | 5/16 | 3740 | 2.1 |
| RF79 | | 7.9 | 12.0 | 88.0 | 25.4 | 16.0 | 2600 | 215 | 5/16 | 15/32 | 3 15/32 | 1 | 5/8 | 5720 | 7.6 |
| Sister Clips | | | | | | | | | | | | | | | |
| RF536 | | 7.0 | 27.0 | 24.0 | - | - | 70 | 5 | 9/32 | 1 1/16 | 15/16 | - | - | 150 | 0.2 |
| RF89 | | 10.0 | 43.0 | 37.0 | - | - | 250 | 10 | 13/32 | 1 11/16 | 1 7/16 | - | - | 550 | 0.4 |
| RF2665 | | 15.0 | 60.0 | 58.0 | - | - | 1800 | 81 | 19/32 | 2 3/8 | 2 1/4 | - | - | 3960 | 2.9 |
| S-Hooks | | | | | | | | | | | | | | | |
| RF50 | | 10.0 | 6.8 | 44.0 | 4.8 | - | 250 | 14 | 13/32 | 1/4 | 1 3/4 | 3/16 | - | 550 | 0.5 |
| RF48A | | 10.0 | 9.0 | 62.0 | 6.0 | - | 400 | 35 | 13/32 | 11/32 | 2 7/16 | 1/4 | - | 880 | 1.2 |
| RF49 | | 12.0 | 11.0 | 76.0 | 8.0 | - | 600 | 65 | 15/32 | 7/16 | 3 | 5/16 | - | 1320 | 2.3 |
| RF51 | | 15.0 | 16.0 | 87.0 | 9.5 | - | 800 | 110 | 19/32 | 5/8 | 3 7/16 | 3/8 | - | 1760 | 3.9 |
| Becketts | | | | | | | | | | | | | | | |
| RF1050 | Eye becket | 8.0 | 5.0 | 9.0 | - | - | - | 6 | 5/16 | 3/16 | 11/32 | - | - | - | 0.2 |
| RF1051 | Eye becket | 8.0 | 6.0 | 9.0 | - | - | - | 6 | 5/16 | 1/4 | 11/32 | - | - | - | 0.2 |
| RF1052 | Fork becket | 5.0 | 5.0 | 11.5 | - | - | - | 9 | 3/16 | 3/16 | 7/16 | - | - | - | 0.3 |
| RF1053 | Fork becket | 5.0 | 6.0 | 14.0 | - | - | - | 9 | 3/16 | 1/4 | 9/16 | - | - | - | 0.3 |

*Eye thickness = 6.4mm (1/4")