

## MOUNTING INSTRUCTION WINCH 101

1. Remove screw (1).
2. Pos. 2 - 9 can now be removed, and the winch base (10) is ready for next step.
3. Mark location of the bolt holes using the winch base as a template.
4. Remove the winch base. Be sure that no dust comes into contact with the winch while drilling the bolt holes.
5. Drill the bolt holes  $\varnothing 6.5\text{mm}$ .
6. Clean the area.
7. Apply a light coat of bedding compound, ensuring that each hole is bedded.
8. Fasten the winch base into place using 6 pcs M6 countersunk head screws. Use large washers or a backing plate.
9. Assemble in reverse order.
10. Check that the winch is functioning correctly.

## SERVICE INSTRUCTION WINCH 101

Maintenance interval 1-2 years, depending on operating conditions.

(Dismantling procedure according to Mounting Instruction no. 1– 2 above)

1. Clean all moving parts with benzine.
2. Check pawls & springs for wear and replace if necessary. Note. The upper pawl in the winch top is not replaceable.
3. Reassemble the winch lightly greasing all moving parts.
4. Check that the winch is functioning correctly.

Service Kit No. 15 (part no. 710015) contains service parts for this winch.

## PARTS LIST WINCH 101 ver. 1.1

POS	QTY	DESCRIPTION	PART NO.
1	1	SCREW M8 x 16	DIN964-A4-M8X16
2	1	WINCH TOP 101 (complete)	964900
3	1	WASHER $\varnothing 38$	RD965200
4	1	DRUM 101-102	963905
5	1	WINCH HANDLE 101	511001
6	1	PAWL W/SPRING	966301
7	1	CIRCLIP	DIN471-A2-A8
8	1	DRIVE SOCKET 101 (complete)	965500
9	1	WASHER $\varnothing 110,5$	RD965800
10	1	WINCH BASE 101	965400

## SAFETY NOTICES

### ALL WINCHES

**Read All Safety Notices and Product Manuals**  
Do not install or operate this winch before reading and fully understanding the contents of this Safety Notice Sheet and the Product Manual.

**Stay Alert When Operating**  
Andersen winches are very powerful and have the potential to cause significant damage and/or serious injury if used improperly or without due caution and vigilance.

**Operators Must Be Trained**  
Help prevent significant damage and/or serious injury by ensuring any person operating a winch has a thorough understanding of its proper operation and is aware of the potential hazards involved. As a minimum, all winch operators must read and understand this Safety Notice Sheet and the Product Manual. Particular attention is drawn to the following points:

- Children and others not qualified to operate an electric winch must be kept at a safe distance from the winch and any rigging or fittings that are under load.
- Long hair and/or loose clothing must be tied back to avoid being caught in the winch.
- In the event of a rope override or other fault, stop the winch and turn off power before attempting to resolve the problem.

**Avoid Accidental Operation**  
Remove winch handles and turn off power to the winch when not in use to help avoid unsupervised or unintentional operation. Failure to do so could result in significant damage and/or serious injury.


**Maintenance**  
Turn off power to the winch before performing any maintenance or service tasks. Failure to do so could result in significant damage and/or serious injury.

**Lifting Operations**  
The winch must not be operated with the rope in the self tailer when used in any kind of lifting operation.  
Any lifting operations should be conducted by two persons in order to maintain constant visual contact with the object being lifted.  
Furthermore the self-tailer must not be used as a cleat for a rope used to lift or suspend any object. The rope must be secured properly by tying off, or leading to a suitable fitting such as a cleat or bollard.

Failure to observe these precautions could result in serious injury or death.

**DO NOT DISCARD**

## EXPLODED VIEW WINCH 101

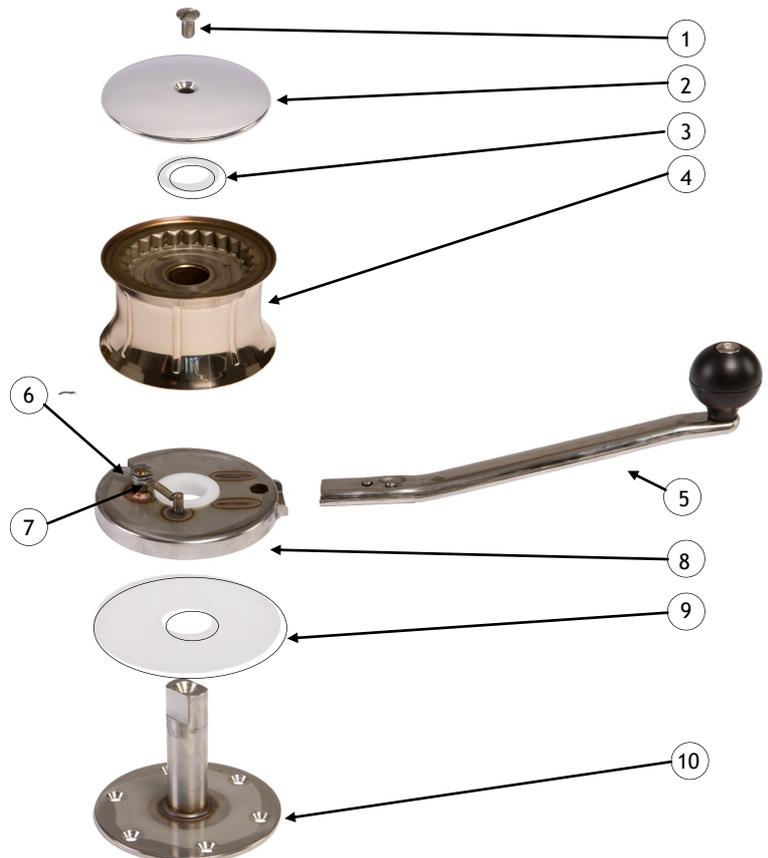

**WORLD WIDE DISTRIBUTION & SERVICE**

(FOR UPDATED DISTRIBUTOR LIST, PLEASE SEE [WWW.ANDERSENWINCHES.COM](http://WWW.ANDERSENWINCHES.COM))

**WARRANTY**

Refer to our website [www.ronstan.com/warranty](http://www.ronstan.com/warranty) for our warranty terms and conditions

Part no.: 710292

Manual  
**WINCH 101**  
ver. 1.1

